


BS 5051 (1988)

Bullet resistant glazing Part 1: Specification for glazing for interior use

	Class Threat Level	Type of Weapon	Calibre	Ammunition	No of Shots	Velocity (m/s)	Test Range (m)	Spacing (mm)
	G0	Hand Gun	9mm	9mm MK2z std	3	390 +/- 30	3	100 +/- 10
	G1	Hand Gun	0.357 Magnum	SP/SJ/FN	3	435 +/- 30	3	100 +/- 10
	G2	Hand Gun	0.44 Magnum	SP/SJ/FN	3	456 +/- 30	3	100 +/- 10
	R1	Rifle	5.56	Nato Std 5.56 .ball	3	919 +/- 30	10	100 +/- 20
	R2	Rifle	7.62	Nato Std 7.62 .ball	3	815 +/- 30	10	100 +/- 20
	S86	Shot Gun	12 Bore	SLS	1	406 +/- 40	10	125 +/- 10


Ammunition Legend:

FN - Flat Nose

SLS - Solid Lead Slug

SP - Soft Point

SJ - Semi Jacketed

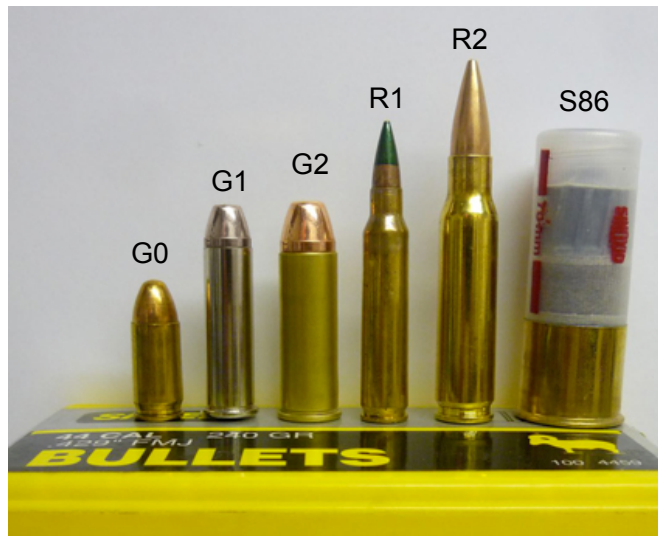

This information is provided as a simple reference guide and does not contain all the relevant testing criteria. Please contact Architectural Armour for more information about our Ballistic Resistant Products or the appropriate testing standards agency for a full detailed specification.