

EN 1063 SG2/FSG Bullet Resistant Board Panels



Ballistic Rating

12mm Board Certified to withstand multiple rounds from a shotgun: Brenneke 12G solid slug

BS EN 1063 SG2/FSG & BS 5051: G2 S86

Certified to EN 1063 BR4, .44 Magnum

Also available:

NIJ 0108.01 Level IIIA

UL752 level 3

Panel Sizes


Nominal thickness 12 mm

Standard panel size 1220mm x 2440mm

Maximum panel size pressed 1220mm x 2900mm

Panels can be cut and machined to suit client specifications.

Approx. weight per m² = 27kg

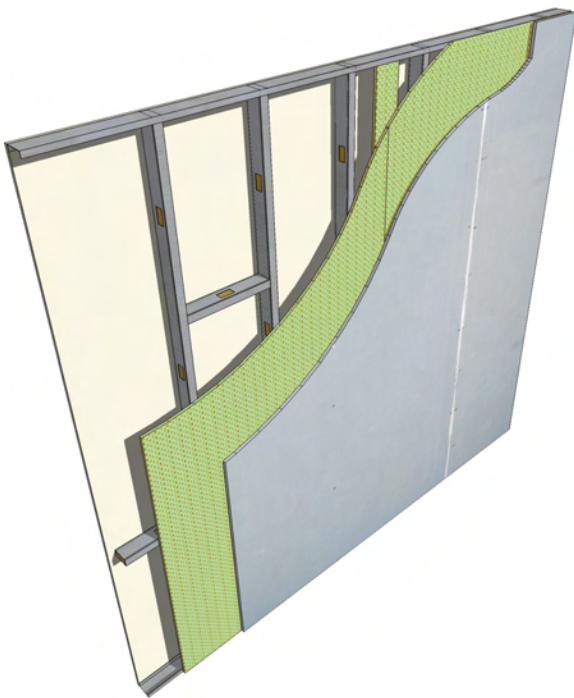

Applications

Panel material used to resist the penetration and ricochet effects of ballistic threats.

Dry Lining

Easy to install, a quick alternative to traditional solid wall, steel armour constructions.

Other Specifications

A full range of ballistic boards are available

7mm EN BR2

10mm EN BR3

12mm EN BR4

26mm AK47

35mm BR5


32mm BR6




Architectural Armour

For our full range of Bullet, Blast & Attack Resistant Windows Walls and Doors contact
+44(0)1981 257000 **sales@architecturalarmour.com** **www.architecturalarmour.com**


WALL FIXINGS FOR BULLET BOARDS TO STUD WALLS

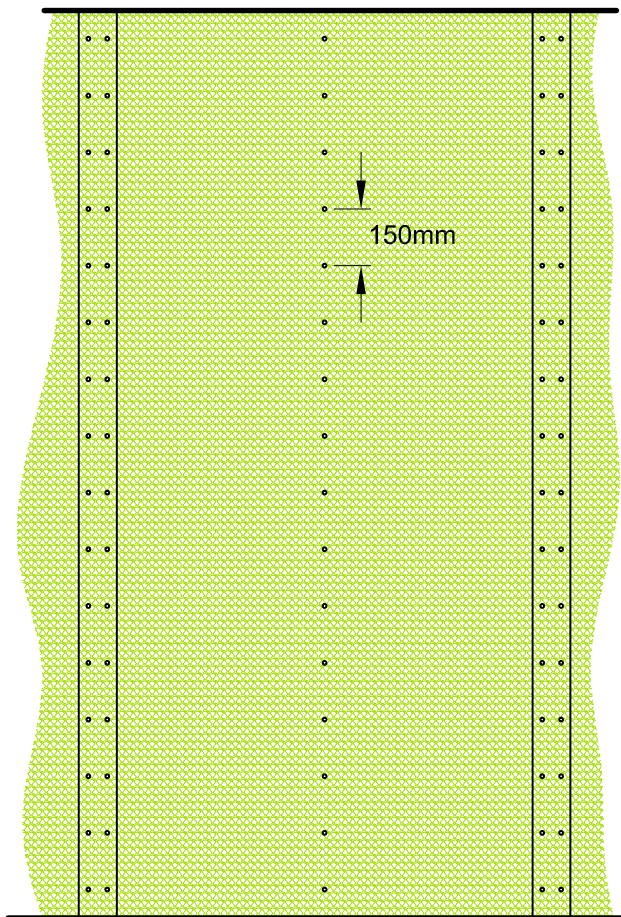

RECOMMENDED VERTICAL
FIXING SPACINGS FOR
BOARDS ATTACHED TO
SECURE SIDE

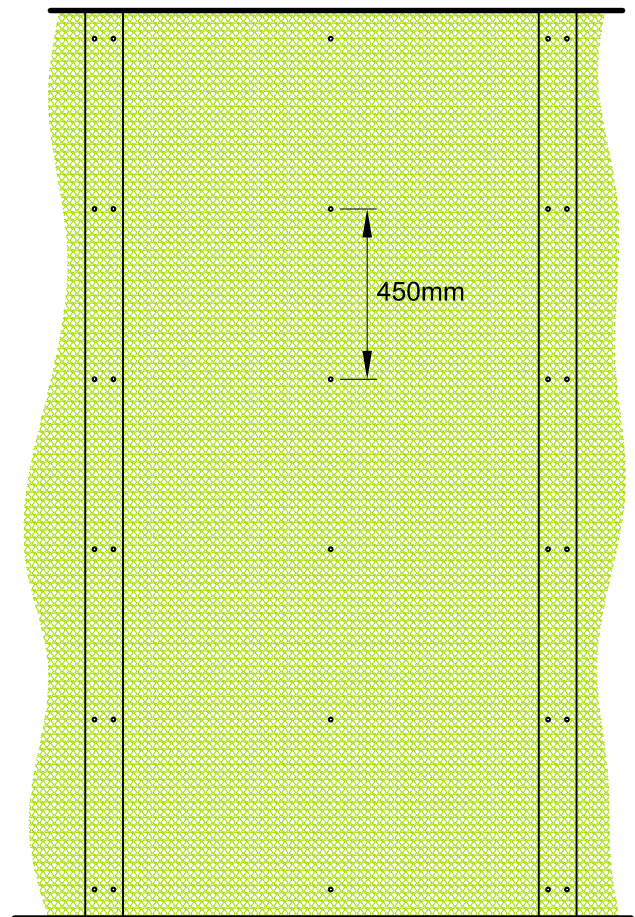

RECOMMENDED VERTICAL
FIXING SPACINGS FOR
BOARDS ATTACHED TO
ATTACK SIDE

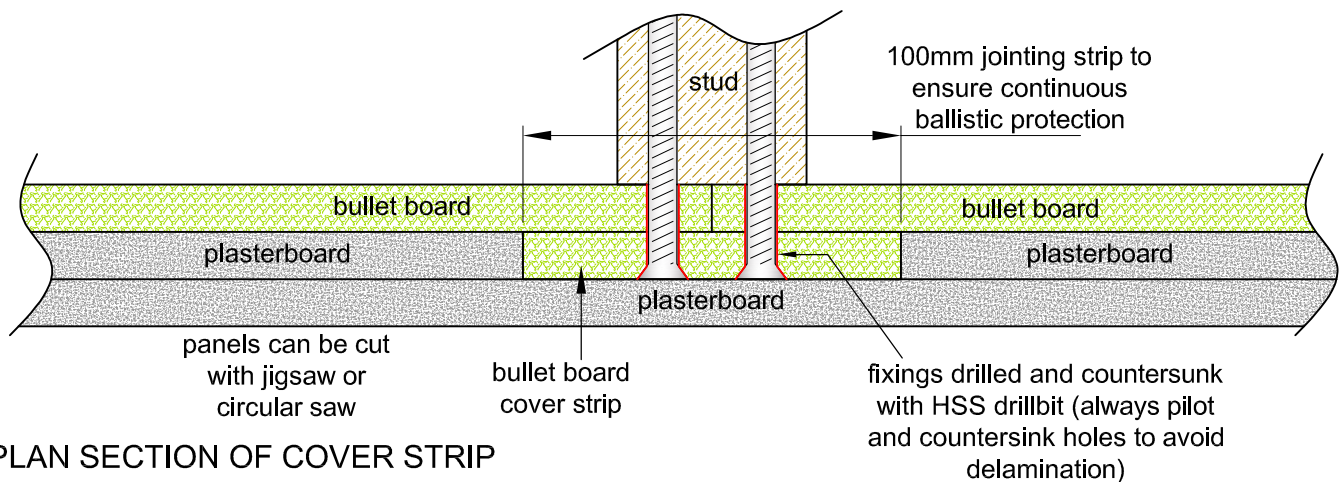


PLAN SECTION OF COVER STRIP



Architectural Armour

For our full range of Bullet, Blast & Attack Resistant Windows Walls and Doors contact
+44(0)1981 257000 sales@architecturalarmour.com www.architecturalarmour.com

FIXING OPTIONS FOR BULLET RESISTANT BOARD PANELS

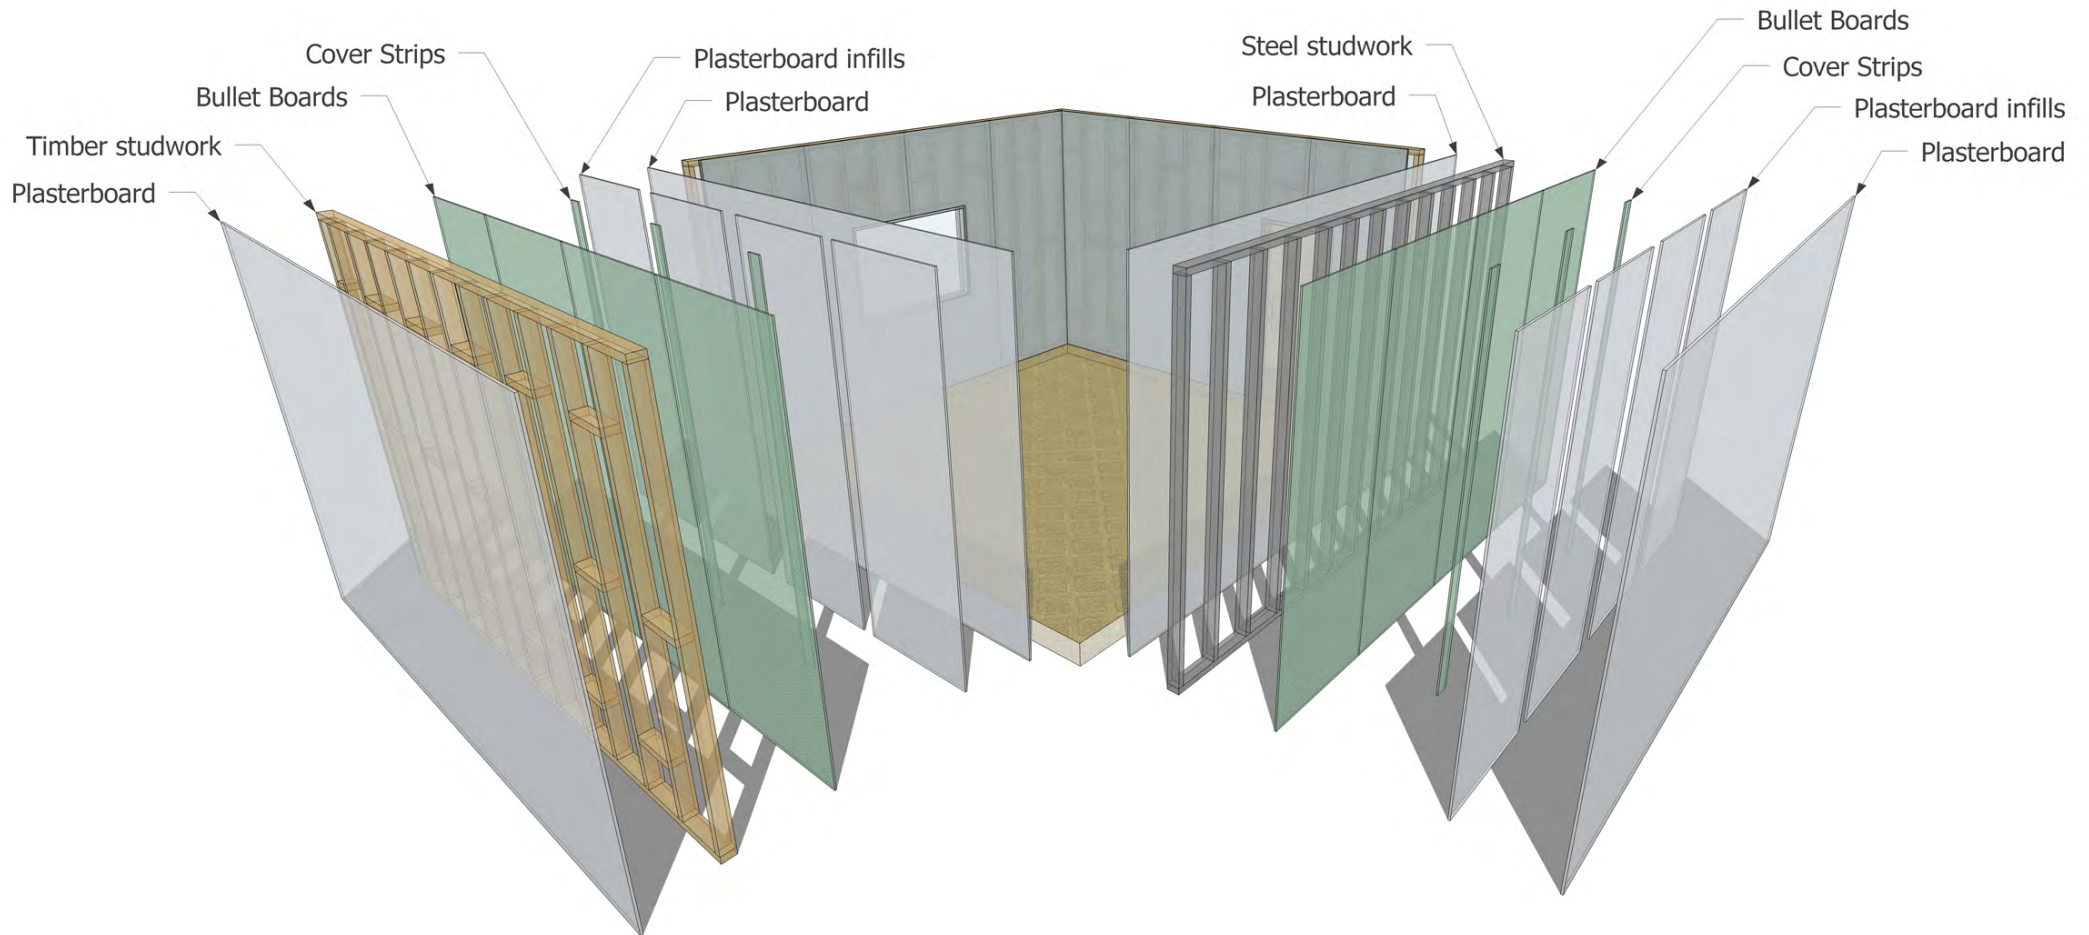

Architectural Armour

For our full range of Bullet, Blast & Attack Resistant Windows Walls and Doors contact
+44(0)1981 257000 **sales@architecturalarmour.com** **www.architecturalarmour.com**